

Dynamics of Rotating Non-Linear Thin-Walled Composite Beams: Analysis of Modeling Uncertainties

Marcelo T. Piovan

mpiovan@frbb.utn.edu.ar
Centro de Investigaciones en Mecánica
Teórica y Aplicada
UTN-FRBB, Argentina

Rubens Sampaio

rsampaio@puc-rio.br
Department of Mechanical Engineering
PUC-Rio, Brazil

Jose M. Ramirez

josemramirez@gmail.com
Centro de Investigaciones en Mecánica
Teórica y Aplicada
UTN-FRBB, Argentina

In this article a non-linear model for dynamic analysis of rotating thin-walled composite beams is introduced. The theory is deduced in the context of classic variational principles and the finite element method is employed to discretize and furnish a numerical approximation to the motion equations. The model considers shear flexibility as well as non-linear inertial terms, Coriolis' effects, among others. The clamping stiffness of the beam to the rotating hub is modeled through a set of spring factors. The model serves as a mean deterministic basis to the studies of stochastic dynamics, which are the objective of the present article. Uncertainties should be considered in order to improve the predictability of a given modeling scheme. In a rotating structural system, uncertainties are present due to a number of facts, namely, loads, material properties, etc. In this study the uncertainties are incorporated in the beam-to-hub connection (i.e. the connection angle and the springs) and the rotating velocity. The probability density functions of the uncertain parameters are derived employing the Maximum Entropy Principle. Different numerical studies are conducted to show the main characteristics of the uncertainty propagation in the dynamics of rotating composite beams.

Keywords: non-linear beams, dynamics, uncertainties, stochastic modeling, rotating composite beams

Introduction

Rotating beams play an important role in the modeling of engineering structures such as turbine blades, airplane propellers and robot manipulators, among others. This subject has been investigated with different levels of intensity and depth, at least, over the last four decades. A historical revision about generally rotating beams can be found in the works of Rao (1987) and Chung and Yoo (2002). In these papers, many epoch-making works are listed as well as recent investigations about rotating beams made of isotropic metallic materials and even composite materials. Simo and Vu-Quoc (1986, 1987) showed that the appropriate consideration of non-linear strain-displacement relationships plays an important role in the correct modeling of the geometric stiffening of flexible beams. It is important to mention that the geometric stiffening has a remarkable effect on the dynamics of rotating and non-rotating beams. Moreover in rotating beams the geometric stiffening is not only due to non-linear strain-displacement relations but also due to centrifugal and Coriolis' effects (Simo and Vu-Quoc (1987) and Trindade and Sampaio (2002)).

In order to improve the predictability of structural models, different types of mechanical hypotheses have been introduced in the mathematical formulation in the context of deterministic behavior. However, many parameters involved in the formulation, such as modulus of elasticity, density, forces, geometrical measures can be uncertain due to a number of facts such as material production, system construction, system operation and so on. Under these circumstances the quantification of the uncertainty introduced in the mechanics of composite structures plays a crucial role. Many articles addressing uncertainty topics in beam structures were published. Cheng and Xiao (2007) studied the stochastic dynamics of beams subjected to axial loads. Lin (2001) as well as Hosseini and Khadem (2007) studied the reliability of rotating beams with uncertain material properties, uncertain geometric parameters and random rotating speed. Ritto et al. (2008) studied the effect of uncertainty on the boundary conditions

of Timoshenko beams.

There are many papers devoted to dynamic analysis of composite beams, for both rotating and non-rotating conditions, and in some papers, several aspects of uncertainty were tackled. Saravia et al. (2011) analyzed the non-linear dynamics of a rotating thin-walled composite beam. In their paper, the method of multiple scales was employed to obtain the equations with which evaluate the steady responses and their stability. Zibdeh and Abu-Hilal (2003) studied the dynamics of composite beams subjected to random moving loads. Chen and Chen (2001) evaluated the effect of flexure-torsion coupling in the dynamics of rotating composite beams subjected to non-stationary random excitation. Li et al. (2005) analyzed the stochastic response of an axially loaded thin-walled beam with closed cross-section. Murugan et al. (2008) analyzed the aeroelastic response of helicopter blades with random material properties.

The purpose of the present paper is to analyze the stochastic dynamics of rotating thin-walled composite beams that have uncertain parameters, and to investigate the propagation of the uncertainty in the dynamic model. A shear deformable linear model of composite thin-walled beams developed by Piovan and Cortínez (2007) is here extended in order to incorporate large rotations and arbitrary axial deformations as well as uncertainty. The uncertainty in the data is considered to be in the connection between the beam and the hub, the elastic connection given by two springs and the orientation beam-hub given by an angle, and in the motion of the beam, which will be described later. The Maximum Entropy Principle (MEP) is employed to construct the probability density function of the model (Soize, 2001), but since no information about correlation of the uncertain parameters is known the MEP says the parameters are uncorrelated. Then a probabilistic model is constructed with the available information for each of the random parameters, since they are independent, using again the Maximum Entropy Principle. With the probabilistic model of the data the propagation of uncertainty is carried out by means of the Monte Carlo method. Although the type of structural member in consideration has the main source

Paper received 10 April 2012. Paper accepted 27 August 2012.

of uncertainty in the material properties and the distribution of the reinforcement fibers, the present study is focused on the analysis of uncertainty propagation due to parameters such as stiffness angles, accelerations, velocities, etc. The propagation of the uncertainty in the material properties and laminate features will be part of future research.

Nomenclature

- $\mathcal{A}, \mathcal{L}, \mathcal{V}$ = beam domains: area, length and volume
- $\bar{A}_{ij}, \bar{D}_{ij}$ = shell elastic properties
- E^*, G^* = elasticity moduli of the material
- $J(\bullet)$ = elastic or mass beam properties
- k_v, k_θ = spring stiffness at hub-to-beam connection
- \mathbf{O}_j = reference center of the frames
- M_{ij}, N_{ij} = shell forces
- u, v = longitudinal and lateral displacement of the bar
- V_i = generic random variable
- \mathbf{F} = force vector
- \mathbf{P}_j = material point
- \mathbf{U} = displacement vector
- $[C]$ = damping matrix
- $[K], [K_G]$ = elastic and geometric stiffness matrices
- $[M], [G]$ = mass and gyroscopic matrices

Greek Symbols

- α = clamping angle
- ψ = prescribed rotation of the whole beam
- ρ = material density
- θ = rotation parameter of the cross-section

Mathematical Model

In Fig. 1 one can see a sketch of a rotating beam undergoing arbitrary in-plane rotations, where $\{\mathbf{O}_B : xyz\}$, $\{\mathbf{O}_R : x_R y_R z_R\}$ and $\{\mathbf{O}_G : x_G y_G z_G\}$ are the local beam frame, rotating frame and inertial fixed frame, respectively. The rotation of the beam is characterized by means of a prescribed rotation $\psi(t)$ around the z_G -axis. α is the angle that identifies the deviation of the beam axis with respect to the radial direction in the point of the beam-to-hub connection. The cross-section has a doubly symmetric closed contour constructed with layered fiber-reinforced plastic laminates whose mechanics is measured according to the intrinsic frame $\{\mathbf{O}_C : xsn\}$, as shown in Fig. 2.

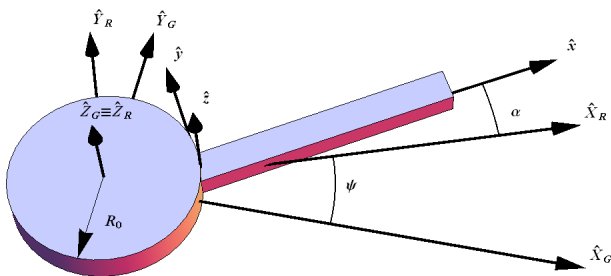


Figure 1. Reference frames of the rotating beam.

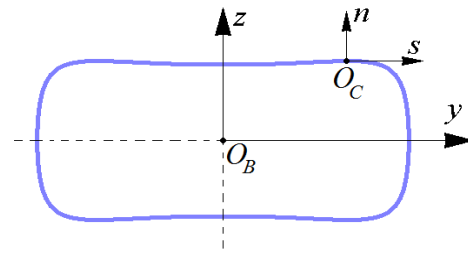


Figure 2. Reference frames of the cross-section.

In order to simplify the model and to concentrate in the stochastic study, the constitutive equations of the composite stacking sequences will be constrained to the cases of especially orthotropic laminates and/or symmetric balanced laminates. With this stacking sequences the possible elastic-constitutive couplings between in-plane (i.e in the plane of rotation) and out-of-plane and/or twisting motions are consistently canceled or, at least, constrained to a negligible amount. The shear strains across the thickness of the wall are neglected as a common assumption in the context of thin-walled modeling. Under these circumstances the stress-strain equations can be reduced to the following form:

$$\begin{Bmatrix} N_{xx} \\ N_{xs} \\ M_{xx} \\ M_{xs} \end{Bmatrix} = \begin{bmatrix} \bar{A}_{11} & \cdot & \cdot & \cdot \\ \cdot & \bar{A}_{66} & \cdot & \cdot \\ \cdot & \cdot & \bar{D}_{11} & \cdot \\ \cdot & \cdot & \cdot & \bar{D}_{66} \end{bmatrix} \begin{Bmatrix} \bar{\epsilon}_{xx} \\ \bar{\gamma}_{xs} \\ \bar{\kappa}_{xx} \\ \bar{\kappa}_{xs} \end{Bmatrix} \quad (1)$$

In Eq. (1) N_{xx} and N_{xs} are membrane forces whereas M_{xx} and M_{xs} are shell moments defined according to Eq. (2). On the other hand, $\bar{\epsilon}_{xx}$, $\bar{\gamma}_{xs}$, $\bar{\kappa}_{xx}$ and $\bar{\kappa}_{xs}$ are shell strains and shell curvatures.

$$\begin{aligned} \{N_{xx}, N_{xs}\} &= \int_e \{\sigma_{xx}, \sigma_{xs}\} dn, \\ \{M_{xx}, M_{xs}\} &= \int_e n \{\sigma_{xx}, \sigma_{xs}\} dn, \end{aligned} \quad (2)$$

The coefficients \bar{A}_{11} , \bar{A}_{66} , \bar{D}_{11} and \bar{D}_{66} are modified elastic coefficients of the shell, re-defined according to Piovan and Cortínez (2007). According to the configuration selected, one can prove (Cortínez and Piovan, 2002) that, for closed cross-sections, the expressions of the effective longitudinal (E^*) and transversal (G^*) elasticity moduli can be written in terms of the laminate elastic coefficients as:

$$E^* = \frac{\bar{A}_{11}}{e} = \frac{12\bar{D}_{11}}{e^3}, \quad G^* = \frac{\bar{A}_{66}}{e} \quad (3)$$

In Eq. (2) and Eq. (3) e is the thickness of the wall, which is assumed constant and deterministic in this paper.

For a beam rotating around the z_G -axis, the position vector of a generic point \mathbf{P} , of the beam domain, with respect to the inertial frame $\mathbf{P}_G(P_{x|G}, P_{y|G})$ and with respect to the rotating frame $\mathbf{P}_R(P_{x|R}, P_{y|R})$ may be written as:

$$\begin{aligned} \mathbf{P}_G &= [T_G] \mathbf{P}_R, \\ \mathbf{P}_R &= [T_R] (\mathbf{U} + \mathbf{X}_B) + \mathbf{R}, \end{aligned} \quad (4)$$

where:

$$\begin{aligned} [T_R] &= \begin{bmatrix} \cos \alpha & -\sin \alpha \\ \sin \alpha & \cos \alpha \end{bmatrix}, \\ [T_G] &= \begin{bmatrix} \cos \psi(t) & -\sin \psi(t) \\ \sin \psi(t) & \cos \psi(t) \end{bmatrix}, \\ \mathbf{U} &= \begin{Bmatrix} u_x \\ u_y \end{Bmatrix}, \mathbf{X}_B = \begin{Bmatrix} x \\ y \end{Bmatrix}, \mathbf{R} = \begin{Bmatrix} R_0 \\ 0 \end{Bmatrix}, \end{aligned} \tag{5}$$

In Eq. (5), u_x and u_y are the displacements of a generic point of the deformed configuration measured with respect to the local frame $\{O_D : xyz\}$, that is:

$$\begin{aligned} u_x(x, y, t) &= u(x, t) - y\theta(x, t) \\ u_y(x, y, t) &= v(x, t) \end{aligned} \tag{6}$$

The variables u , v and θ are the extensional displacement, lateral displacement and bending rotation of the cross-section, respectively. As one can easily see, Eq. (6) is describing a typical shear-deformable, or Timoshenko's formulation.

According to the nomenclature of thin-walled beams, the coordinates of a point in the cross-sectional plane, let's say $\mathbf{B}(y, z)$, can be defined in the intrinsic frame $\{\mathbf{O}_C : xsn\}$ as:

$$y(s, n) = Y(s) - n \frac{dZ(s)}{ds}, z(s, n) = Z(s) + n \frac{dY(s)}{ds}, \tag{7}$$

where $Y(s)$ and $Z(s)$ are the coordinates of the middle line of the shell contour.

Taking into account the definition of the Lagrangian strain tensor and the Eq. (6), one can obtain the relevant components of the strain tensor as:

$$\begin{aligned} \epsilon_{xx} &= u' - y\theta' + \frac{1}{2} [(u' - y\theta')^2 + v'^2] \\ \gamma_{xy} &= (v' - \theta) - [\theta(u' - y\theta')] \end{aligned} \tag{8}$$

For convenience in the algebraic handling, the strain components of Eq. (8) should be transformed and described in the intrinsic frame $\{A : xsn\}$, that is, ϵ_{xx} and γ_{xs} , which can be written in the following form:

$$\mathbf{S} = ([D_L] + n[B_L])\mathbf{S}_L + ([D_{NL}] + n[B_{NL}] + n^2[B_{NL2}])\mathbf{S}_{NL} \tag{9}$$

with

$$\begin{aligned} \mathbf{S} &= \{\epsilon_{xx}, \gamma_{xs}\}^T, \quad \mathbf{S}_L = \{u', \theta', v' - \theta\}^T, \\ \mathbf{S}_{NL} &= \{u'^2, v'^2, \theta'^2, u'\theta', \theta'\theta, u'\theta\}^T \\ [D_L] &= \begin{bmatrix} 1 & -Y & 0 \\ 0 & 0 & dZ/ds \end{bmatrix}, [B_L] = \begin{bmatrix} 0 & dZ/ds & 0 \\ 0 & 0 & 0 \end{bmatrix}, \\ [D_{NL}] &= \begin{bmatrix} 1/2 & 1/2 & 1/2 Y^2 & -Y & 0 & 0 \\ 0 & 0 & 0 & 0 & Y dZ/ds & -dZ/ds \end{bmatrix}, \\ [B_{NL}] &= \begin{bmatrix} 0 & 0 & -Y dZ/ds & dZ/ds & 0 & 0 \\ 0 & 0 & 0 & 0 & (dZ/ds)^2 & 0 \end{bmatrix}, \\ [B_{NL2}] &= \begin{bmatrix} 0 & 0 & 1/2 (dZ/ds)^2 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 \end{bmatrix}. \end{aligned}$$

The velocity vector of a generic point can be obtained from (4) in the following form:

$$\frac{d\mathbf{P}_G}{dt} = \dot{\mathbf{P}}_G = \dot{\psi} [T_{G2}] \mathbf{P}_R + [T_G] [T_R] \dot{\mathbf{U}} \tag{11}$$

where:

$$[T_{G2}] = \begin{bmatrix} -\sin \psi(t) & -\cos \psi(t) \\ \cos \psi(t) & \sin \psi(t) \end{bmatrix} \tag{12}$$

In Eqs. (8), (11) and in the following paragraphs, dots and apostrophes identify derivatives with respect to time and space (i.e. x), respectively.

Now the total potential energy (composed of strain energy and energy stored by root stiffness) and the kinetic energy of a composite rotating beam can be described as:

$$\begin{aligned} U_D &= \frac{1}{2} \int_{\mathcal{V}} \mathbf{S}^T [E_M] \mathbf{S} dV + \frac{k_v}{2} v^2(0, t) + \frac{k_\theta}{2} \theta^2(0, t), \\ U_K &= \frac{1}{2} \int_{\mathcal{V}} \rho \dot{\mathbf{P}}_G \cdot \dot{\mathbf{P}}_G dV, \end{aligned} \tag{13}$$

where $[E_M] = \text{diag}[E^*, G^*]$, whereas E^* , G^* and ρ are the Young's modulus, shear modulus and material density, respectively. E^* and G^* are given in Eq. (3). In order to account for the effective shear stress distribution according to a first-order-shear beam formulation, the shear modulus can be affected by the factor κ , which is a class of Timoshenko's shear coefficient that can be consistently calculated, for composite beams, following the methodology given by Piovan and Cortínez (2005) or Cortínez and Piovan (2002).

Now, substituting Eqs. (8) and (11) into Eq. (13), one obtains:

$$\begin{aligned} U_D &= \frac{1}{2} \int_{\mathcal{L}} [J_{11}^E u'^2 + J_{22}^E \theta'^2 + J_{11}^G (v' - \theta)^2] dx + \\ &\frac{1}{2} \int_{\mathcal{L}} [J_{11}^E (u'^3 + u'v'^2) - 3J_{22}^E u'\theta'^2] dx - \\ &\frac{1}{2} \int_{\mathcal{L}} [2J_{11}^G (v' - \theta)u'\theta' + J_{22}^G \theta^2 \theta'^2] dx + \\ &\frac{1}{2} \int_{\mathcal{L}} \left[\frac{J_{11}^E}{4} (u'^2 + v'^2)^2 + \frac{J_{33}^E \theta'^4}{4} \right] dx + \\ &\frac{1}{2} \int_{\mathcal{L}} \left[\frac{J_{22}^E \theta'^2}{2} (3u'^2 + v'^2) + J_{11}^G u'^2 \theta'^2 \right] dx + \\ &\frac{1}{2} [k_v v^2(0, t) + k_\theta \theta^2(0, t)], \end{aligned} \tag{14}$$

$$\begin{aligned}
 U_K = & \frac{1}{2} \int_{\mathcal{L}} J_{11}^{\rho} \left[\dot{u}^2 + \dot{v}^2 + 2\dot{\psi}(\dot{v}(u+x+R_0C_{\alpha})) \right] dx + \\
 & \frac{1}{2} \int_{\mathcal{L}} J_{11}^{\rho} \left[\dot{\psi}^2 (u^2 + v^2) - 2\dot{\psi}\dot{u}(v+R_0S_{\alpha}) \right] dx + \\
 & \frac{1}{2} \int_{\mathcal{L}} J_{11}^{\rho} \left[\dot{\psi}^2 (2ux + x^2 + R_0^2) \right] dx + \\
 & \frac{1}{2} \int_{\mathcal{L}} J_{11}^{\rho} \left[2\dot{\psi}^2 ((u+x)R_0C_{\alpha} - vR_0S_{\alpha}) \right] dx + \\
 & \frac{1}{2} \int_{\mathcal{L}} J_{22}^{\rho} \left[\dot{\theta}^2 + 2\dot{\theta}\dot{\psi} + (1+\theta^2)\dot{\psi}^2 \right] dx,
 \end{aligned} \quad (15)$$

where for simplification purposes, $C_{\alpha} = \cos \alpha$ and $S_{\alpha} = \sin \alpha$ and:

$$\left\{ J^E, J^G, J^{\rho} \right\} = \int_{\mathcal{A}} \{ E^*, G^*, \rho \} \mathbf{g}^T \mathbf{g} ds dn, \quad \mathbf{g} = \{ 1, y, y^2 \}^T. \quad (16)$$

In order to calculate the elastic and inertial properties of the cross-section, one should employ in Eq. (16) the definitions given in Eq. (7). For more details, the interested reader should see Cortínez and Piovan (2002).

The non-linear equations of motion can be derived by means of the Hamilton's principle, i.e.:

$$\delta \int_{t_1}^{t_2} (U_K - U_{DR}) dt = 0, \quad (17)$$

where U_{DR} is the reduced strain energy derived from Eq. (14) in which the double underlined terms are assumed negligible as in other papers devoted to study rotating beam made of isotropic materials (Trindade and Sampaio, 2002). This viewpoint is consistently discussed in a study of the geometric stiffening effect in flexible beams carried out by Mayo et al. (2004). If all underlined terms of Eq. (14) are removed, a linear formulation is obtained.

Finite Element Discretization

Computational models can be constructed through the discretization of the Eq. (17) by an appropriate scheme. The discretization is carried out using a 2-node finite element with three kinematic variables at each node. Lagrange linear shape functions (\mathbf{N}_u), cubic shape functions (\mathbf{N}_v) and quadratic shape functions (\mathbf{N}_{θ}) are employed for axial displacements, lateral displacements and bending rotations, respectively, i.e.:

$$\begin{aligned}
 u &= \mathbf{N}_u \mathbf{q}_e, \\
 v &= \mathbf{N}_v \mathbf{q}_e, \\
 \theta &= \mathbf{N}_{\theta} \mathbf{q}_e,
 \end{aligned} \quad (18)$$

where:

$$\begin{aligned}
 \mathbf{q}_e &= \{ u_1, v_1, \theta_1, u_2, v_2, \theta_2 \}^T, \\
 \mathbf{N}_u &= \{ 1 - \xi, 0, 0, \xi, 0, 0 \}, \\
 \mathbf{N}_v &= \left\{ 0, \frac{1+\beta(1-\xi)-3\xi^2+2\xi^3}{1+\beta}, \frac{[2+\beta-(4+\beta)\xi+2\xi^2]\xi L_e}{2(1+\beta)}, \right. \\
 & \left. 0, \frac{\beta\xi+3\xi^2-2\xi^3}{1+\beta}, \frac{[-\beta+(\beta-2)\xi+2\xi^2]\xi L_e}{2(1+\beta)} \right\}, \\
 \mathbf{N}_{\theta} &= \left\{ 0, \frac{6\xi(\xi-1)}{L_e(1+\beta)}, \frac{[1+\beta-(4+\beta)\xi+3\xi^2]}{1+\beta}, \right. \\
 & \left. 0, -\frac{6\xi(\xi-1)}{L_e(1+\beta)}, \frac{(-2+\beta+3\xi)\xi}{1+\beta} \right\},
 \end{aligned} \quad (19)$$

L_e is the length of the generic element, ξ and β are defined as:

$$\xi = \frac{x}{L_e}, \quad \beta = \frac{12J_{22}^E}{L_e^2 J_{11}^G}. \quad (20)$$

The shape functions of \mathbf{N}_v and \mathbf{N}_{θ} (that correspond to a Timoshenko's beam theory or to a typical first-order shear deformable beam theory) are thoroughly introduced in the works of Przemieniecki (1968) and Bathe (1982). On the one hand, the interpolating functions give a consistent integration of the equations of a shear-deformable isotropic beam, as one can see in the aforementioned references. On the other hand, it was shown that they can be useful also for shear-deformable composite beams (Piovan and Cortínez, 2007). In both cases, avoiding the shear-locking effect. Moreover, \mathbf{N}_v and \mathbf{N}_{θ} can also be employed to approximate the solution of a Bernoulli-Euler beam equation, because the interpolating functions may be reduced to cubic and quadratic Hermite's polynomials, if the condition of infinite shear stiffness (or $\beta \rightarrow 0$) is invoked (Przemieniecki, 1968).

Now, substituting Eq. (18) in Eqs. (14) and (15), after performing the conventional steps of variational calculus in Eq. (17) one gets the equation for a single finite element in the following form:

$$\begin{aligned}
 [M_e] \ddot{\mathbf{q}}_e - \dot{\psi} [G_e] \dot{\mathbf{q}}_e + ([K_e] + [K_g(\mathbf{q}_e)]) \mathbf{q}_e - \\
 (\dot{\psi}^2 [M_e] + \dot{\psi} [G_e]) \mathbf{q}_e = \dot{\psi}^2 \mathbf{f}_A - \dot{\psi} \mathbf{f}_T,
 \end{aligned} \quad (21)$$

where

$$[M_e] = \int_0^1 \left[J_{11}^{\rho} \left(\mathbf{N}_u^T \mathbf{N}_u + \mathbf{N}_v^T \mathbf{N}_v \right) + J_{22}^{\rho} \mathbf{N}_{\theta}^T \mathbf{N}_{\theta} \right] L_e d\xi, \quad (22)$$

$$[G_e] = 2 \int_0^1 \left[J_{11}^{\rho} \left(\mathbf{N}_u^T \mathbf{N}_v - \mathbf{N}_v^T \mathbf{N}_u \right) \right] L_e d\xi, \quad (23)$$

$$\begin{aligned}
 [K_e] = & \int_0^1 \left[J_{11}^E \mathbf{N}'_u \mathbf{N}'_u + J_{22}^E \mathbf{N}'_{\theta} \mathbf{N}'_{\theta} \right] \frac{1}{L_e} d\xi + \\
 & \int_0^1 \left[J_{11}^G \left(\mathbf{N}'_v - L_e \mathbf{N}'_{\theta} \right) \left(\mathbf{N}'_v - L_e \mathbf{N}_{\theta} \right) \right] \frac{1}{L_e} d\xi,
 \end{aligned} \quad (24)$$

$$\begin{aligned}
 [K_g] = & \int_0^1 \frac{J_1^E}{2L_e^2} \left[3\mathbf{N}'_u{}^T \mathbf{N}'_u \mathbf{q}_e \mathbf{N}'_u + \mathbf{N}'_u{}^T \mathbf{N}'_v \mathbf{q}_e \mathbf{N}'_v \right] d\xi + \\
 & \int_0^1 \frac{J_1^E}{2L_e^2} \left[\mathbf{N}'_v{}^T \mathbf{N}'_u \mathbf{q}_e \mathbf{N}'_v + \mathbf{N}'_v{}^T \mathbf{N}'_v \mathbf{q}_e \mathbf{N}'_u \right] d\xi + \\
 & \int_0^1 \frac{3J_2^E}{2L_e^2} \left[\mathbf{N}'_u{}^T \mathbf{N}'_\theta \mathbf{q}_e \mathbf{N}'_\theta + \mathbf{N}'_\theta{}^T \mathbf{N}'_u \mathbf{q}_e \mathbf{N}'_\theta \right] d\xi + \\
 & \int_0^1 \frac{3J_2^E}{2L_e^2} \left[\mathbf{N}'_\theta{}^T \mathbf{N}'_\theta \mathbf{q}_e \mathbf{N}'_u \right] d\xi - \\
 & \int_0^1 \frac{J_1^G}{2L_e} \left[\mathbf{N}'_u{}^T \mathbf{N}_\theta \mathbf{q}_e (\mathbf{N}'_v - L_e \mathbf{N}_\theta) \right] d\xi - \\
 & \int_0^1 \frac{J_1^G}{2L_e} \left[\mathbf{N}'_u{}^T (\mathbf{N}'_v - L_e \mathbf{N}_\theta) \mathbf{q}_e \mathbf{N}_\theta \right] d\xi - \\
 & \int_0^1 \frac{J_1^G}{2L_e} \left[\mathbf{N}_\theta{}^T \mathbf{N}'_u \mathbf{q}_e (\mathbf{N}'_v - L_e \mathbf{N}_\theta) \right] d\xi - \\
 & \int_0^1 \frac{J_1^G}{2L_e} \left[+\mathbf{N}_\theta{}^T (\mathbf{N}'_v - L_e \mathbf{N}_\theta) \mathbf{q}_e \mathbf{N}'_u \right] d\xi - \\
 & \int_0^1 \frac{J_1^G}{2L_e} \left[(\mathbf{N}'_v{}^T - L_e \mathbf{N}_\theta{}^T) \mathbf{N}_\theta \mathbf{q}_e \mathbf{N}'_u \right] d\xi - \\
 & \int_0^1 \frac{J_1^G}{2L_e} \left[(\mathbf{N}'_v{}^T - L_e \mathbf{N}_\theta{}^T) \mathbf{N}'_u \mathbf{q}_e \mathbf{N}_\theta \right] d\xi,
 \end{aligned} \tag{25}$$

$$\mathbf{f}_A = \int_0^1 \left[J_{11}^p \mathbf{N}'_u{}^T (L_e \xi + R_0 C_\alpha) - J_{11}^p \mathbf{N}'_v{}^T R_0 S_\alpha \right] L_e d\xi, \tag{26}$$

$$\begin{aligned}
 \mathbf{f}_T = & \int_0^1 \left[J_{11}^p \mathbf{N}'_v{}^T (L_e \xi + R_0 C_\alpha) \right] L_e d\xi + \\
 & \int_0^1 \left[J_{11}^p \mathbf{N}'_u{}^T R_0 S_\alpha + J_{22}^p \mathbf{N}'_\theta{}^T \right] L_e d\xi.
 \end{aligned} \tag{27}$$

After the assembling process one gets the following expression:

$$[M] \ddot{\mathbf{Q}} + [C] \dot{\mathbf{Q}} + ([K] + [K_G(\mathbf{Q})] + [K_D]) \mathbf{Q} = \mathbf{F}, \tag{28}$$

where $[M]$ is the global mass matrix, $[C]$ is the global gyroscopic matrix, $[K]$ is the global elastic stiffness matrix, $[K_G]$ is the global geometric stiffness matrix, $[K_D]$ corresponds to the stiffness induced by the rotation of the beam and \mathbf{F} is the global vector of dynamical forces. One may notice that $[K_D]$ is not symmetric due to the presence of the term proportional to the angular acceleration $\ddot{\psi}$.

The matrix $[C]$ can be modified in order to account for "a posteriori" structural damping, i.e.:

$$[C] = [G] + [C_{RD}]. \tag{29}$$

In the previous equation, $[G]$ is the global gyroscopic matrix, whereas $[C_{RD}]$ is the system proportional damping matrix, which is calculated as:

$$[C_{RD}] = \eta_1 [M] + \eta_2 [K]. \tag{30}$$

The coefficients η_1 and η_2 can be computed from modal damping coefficients (namely, ξ_1 and ξ_2 , from experiments) for the first and second frequencies according to the common methodology presented in the bibliography, related to finite element procedures (Bathe, 1982)

and vibration analysis (Meirovitch, 1997). Remember that $[M]$ is the global mass matrix and $[K]$ is the global elastic stiffness matrix. The Matlab Odesuite is employed to numerically simulate the finite element model, for this reason Eq. (28) is represented in the following form:

$$[A] \frac{d\mathbf{W}}{dt} + [B] \mathbf{W} = \mathbf{D}, \tag{31}$$

where:

$$\begin{aligned}
 [A] &= \begin{bmatrix} [C] & [M] \\ [M] & [0] \end{bmatrix}, \\
 [B] &= \begin{bmatrix} [K] + [K_G(\mathbf{Q})] + [K_D] & [0] \\ [0] & -[M] \end{bmatrix}, \\
 \mathbf{W} &= \begin{Bmatrix} \mathbf{Q} \\ \dot{\mathbf{Q}} \end{Bmatrix}, \quad \mathbf{D} = \begin{Bmatrix} \mathbf{F} \\ \mathbf{0} \end{Bmatrix}.
 \end{aligned} \tag{32}$$

Equation (31) is subjected to the initial condition $\mathbf{W} = \mathbf{W}_0$.

Probabilistic Model

In this article the Maximum Entropy Principle (MEP) is employed in order to construct the probabilistic model for the uncertain parameters. Three parameters related to the beam-to-hub connection will be chosen as uncertain: the springs stiffness (k_v and k_θ) at the hub, the connection angle α . Also three parameters connected with the rotational angle ψ will be considered uncertain. These parameters characterize the angular acceleration of the angular velocity. Depending on the type of rotating law associated with angle ψ one or two kinematic parameters are introduced. The stiffnesses will be considered unbounded positive random variables and the two angles bounded random variables. The random variables V_1, V_2 , and V_3 , related to constructive aspects, as well as random variables V_4, V_5 and V_6 , related to the kinematics, are introduced to construct the probability models. The random variables V_1 and V_2 identify the hub stiffnesses k_v and k_θ , V_3 is associated with the connection angle α , whereas random variable V_4 identifies the parameter of a rotation rule with constant acceleration/deceleration segments, and finally random variables V_5 and V_6 identify time and opening angle parameters of a rotation law with smooth variation. Depending on the type of rotational law involved a probabilistic model with four (V_1, V_2, V_3 and V_4) or five (V_1, V_2, V_3, V_5 and V_6) random variables will be employed. The available information to prepare the probabilistic model is that the mean value of each random variable is known, i.e. $\mathbb{E}(V_i) = \underline{V}_i$, and that each random parameter is considered positive. Then, using the MEP and the information that the random variables $V_i, i = 1, \dots, 6$ are supposed to be positive, the MEP gives the result that they must be independent. Consequently, the probability density function for random variables V_1 and V_2 , using the MEP, leads to (Ritto et al., 2008; Soize, 2001):

$$\begin{aligned}
 p_{V_i}(v_i) = & \mathbf{1}_{]0, \infty[}(v_i) \frac{(\delta_{V_i}^{-2})^{\delta_{V_i}^{-2}}}{V_i \Gamma(\delta_{V_i}^{-2})} \left(\frac{v_i}{V_i}\right)^{\delta_{V_i}^{-2}-1} \times \\
 & \times \exp\left(-\frac{v_i}{\delta_{V_i}^2 V_i}\right), V_i = \begin{cases} k_v, i = 1 \\ k_\theta, i = 2 \end{cases}
 \end{aligned} \tag{33}$$

where δ_{V_i} and \underline{V}_i , $i = 1, 2$ are the dispersion parameter and the mean value of the random variable V_i . $\mathbf{1}_{]0, \infty[}(v_i)$ is the support function of the random variable and $\Gamma(\zeta) = \int_0^\infty t^{\zeta-1} e^{-t} dt$ is the gamma function defined for $\zeta > 0$. The dispersion parameters δ_{V_1} and δ_{V_2} are confined in the range $]0, \sqrt{1/3}]$. This is due to V_1 and V_2 must be random variables of second order. Since V_3 and V_4 and V_5 and V_6 are bounded the MEP says they are distributed uniformly. Thus, the distribution of random variables V_i , $i = 3, \dots, 6$ can be written in the following generic form:

$$p_{V_i}(v_i) = \mathbf{1}_{[\mathcal{L}_{V_i}, \mathcal{U}_{V_i}]}(v_i) \frac{1}{2\sqrt{3}\underline{V}_i\delta_{V_i}}, i = 3, \dots, 6 \quad (34)$$

where $\mathbf{1}_{[\mathcal{L}_{V_i}, \mathcal{U}_{V_i}]}(v_i)$ is the generic support function, whereas \mathcal{L}_{V_i} and \mathcal{U}_{V_i} are the lower and upper limits of the random variable V_i . Once again δ_{V_i} and \underline{V}_i are the dispersion parameter and the mean value of the random variable V_i , $i = 3, \dots, 6$.

The Matlab function $\text{gamrnd}(1/\delta_{V_i}^2, \delta_{V_i}^2 \underline{V}_i)$ can be used to generate the realizations of the random variables V_1 , and V_2 , according to Eq. (33), whereas the function $\text{unifrnd}(\underline{V}_i(1 - \delta_{V_i}\sqrt{3}), \underline{V}_i(1 + \delta_{V_i}\sqrt{3}))$ can be used to generate realizations for the random variables $\underline{V}_3, \underline{V}_4, \underline{V}_5$ and \underline{V}_6 .

Then, employing Eq. (33) and Eq. (34) into the finite element model given in Eq. (28) and then in Eqs. (31)-(32), the stochastic finite element model is finally written as:

$$[\bar{A}] \frac{d\bar{W}}{dt} + [\bar{B}] \bar{W} = \bar{D}, \quad (35)$$

with:

$$\begin{aligned} [\bar{A}] &= \begin{bmatrix} [\bar{C}] & [\bar{M}] \\ [\bar{M}] & [\bar{0}] \end{bmatrix}, \\ [\bar{B}] &= \begin{bmatrix} [\bar{K}] + [\bar{K}_G(\bar{Q})] + [\bar{K}_D] & [\bar{0}] \\ [\bar{0}] & -[\bar{M}] \end{bmatrix}, \\ \bar{W} &= \begin{Bmatrix} \bar{Q} \\ \dot{\bar{Q}} \end{Bmatrix}, \quad \bar{D} = \begin{Bmatrix} \bar{F} \\ \mathbf{0} \end{Bmatrix}. \end{aligned} \quad (36)$$

where, the bar over the vectors and matrices identifies the random coefficient. Thus, the stiffness matrix $[\bar{K}]$ is random due to the presence of random variables V_1 and V_2 , whereas matrix $[\bar{K}_D]$ is random due to random variables V_3 and V_4 (or V_5 and V_6 depending on the case). The matrix $[\bar{C}]$ is random due to V_4 (or V_5 and V_6) and due to the random characteristics of $[\bar{K}]$. The geometric stiffness matrix $[\bar{K}_G(\bar{Q})]$ is random due to the random nature of the displacements \bar{Q} . The force vector \bar{F} is random due to random variables V_3 and V_4 (or V_5 and V_6).

The Monte Carlo method is used to simulate the stochastic dynamics, which implies the integration of a deterministic system for each realization of random variables V_i , $i = 1, \dots, 6$. Recall that the probabilistic model can be of four or five random variables depending on the rotation rule selected. In order to control the quality of the simulation process within a prescribed level of approximation, the mean-square convergence of the stochastic response \bar{Q} has to be evaluated. The convergence is calculated appealing to the following function:

$$\text{conv}(N_{MS}) = \sqrt{\frac{1}{N_{MS}} \sum_{j=1}^{N_{MS}} \int_{t_0}^{t_1} \|\bar{Q}_j(t)\|^2 dt} \quad (37)$$

where N_{MS} is the number of Monte Carlo samplings.

Numerical Studies

For the numerical studies a composite box-beam with rectangular cross-section is employed. The measures of the cross-section are such that $L_y = 3L_z = 3 \text{ cm}$ and the wall-thickness is $e_n = 2 \text{ mm}$. The beam is constructed with graphite fiber reinforced epoxy resin AS4/3501, whose material properties are: $E_1 = 144 \text{ GPa}$, $E_2 = 9.65 \text{ GPa}$, $G_{12} = 4.14 \text{ GPa}$, $G_{13} = 4.14 \text{ GPa}$, $G_{23} = 3.45 \text{ GPa}$, $\nu_{12} = 0.3$; $\nu_{13} = 0.3$; $\nu_{23} = 0.5$; $\rho = 1389 \text{ kg/m}^3$. The considered laminate schemes are $\{0/0/0/0\}$, $\{0/90/90/0\}$ and $\{45/-45/-45/45\}$. For qualitative comparison purposes the configuration of the rotating beam and the hub radius is restricted to $L + R_0 = 1.2 \text{ m}$ with $R_0/L \in [0.2, 1.0]$.

In the following examples, models of 20 finite elements are employed to perform the deterministic calculations of each realization in the Monte Carlo Method. It was shown (Piovan, 2003) that with the interpolation functions of Eq. (19) in the finite elements, it is needed a mesh of no more than 20 elements in order to achieve a precision of 99% in the first six natural frequencies. Another important topic is to ensure the convergence of the Monte Carlo simulation in the sense of the norm given by Eq. (37). A convergence analysis was performed for a given set of dispersion parameters, and it was verified that the approximation converges for $N_{MS} = 400$ for a prescribed precision of 99%, although in some cases even with $N_{MS} = 200$ it is possible to reach the prescribed precision. In Fig. 3 it is possible to see an example of the convergence in the sense of the mean-square.

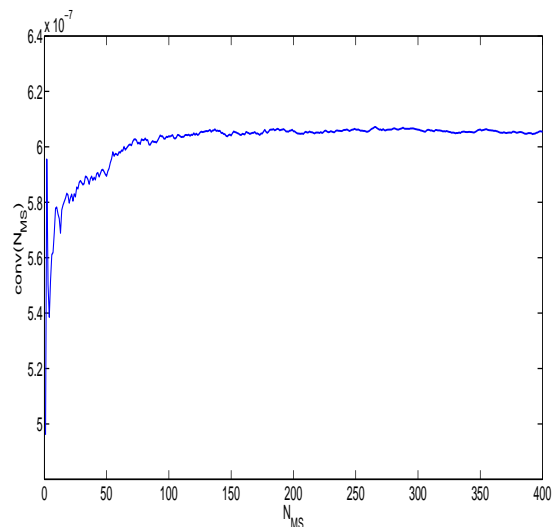


Figure 3. Convergence in the mean-square sense .

Among many studies that can be performed in rotating beams with uncertain properties, the present analysis of uncertainty in rotating beam dynamics is focused on the transient vibrations according to given rules in the positioning angle and how the uncertainties propagate into the response.

The first case corresponds to a beam that rotates following the rule:

$$\dot{\psi} = \begin{cases} At, & \forall t \in [0, 2) \\ A(4-t), & \forall t \in [2, 4) \\ 0, & \forall t > 4 \end{cases} \quad (38)$$

where $A = V_4$ is a uniform random variable. In Fig. 4 one can see the tip lateral displacement of a rotating beam constructed with the stacking sequence $\{0/0/0/0\}$, with $R_0/L = 0.2$ and the following mean values in the random parameters: $\underline{V}_1 = \underline{V}_2 = 10^2 \max([K_{ii}])$, $\underline{V}_3 = 0.1 \text{ rad}$ and $\underline{A} = \underline{V}_4 = 5.0 \text{ rad/s}^2$. The stochastic simulation was performed with 400 samplings and a coefficient of variation $\delta_{V_i} = \sigma_{V_i}/\underline{V}_i = 0.05, i = 1, \dots, 4$. Clearly, σ_{V_i} is the standard deviation of $V_i, i = 1, \dots, 4$. In Fig. 5 one can see the same response of the previous figure but for coefficient of variation $\delta_{V_i} = 0.1$. In both figures, the upper and lower bounds of the 98% confidence interval are shown.

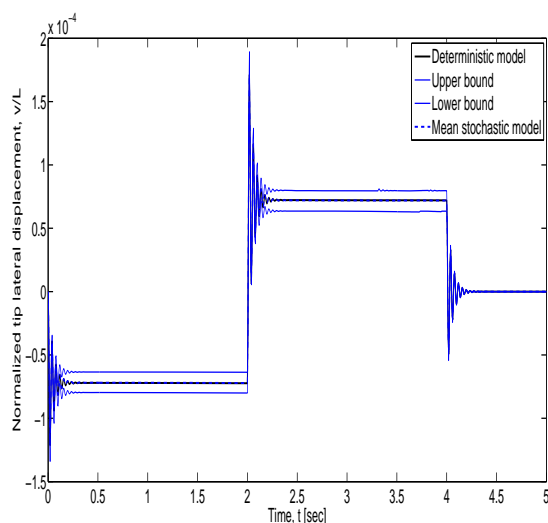


Figure 4. Tip displacement history for a composite beam that rotates according to Eq. (38), for $\delta_{V_i} = 0.05$ in all variables.

Other studies were carried out by analyzing the propagation of uncertainty due to the aforementioned random variables, but one by one separately. For example in Fig. 6(a) one can see the influence of only the random variable V_3 (i.e. clamping angle α), whereas in Fig. 6(b) one can see the influence of solely the random variable V_4 (i.e. the speed of the positioning angle). In both cases the same variation coefficient $\delta = 0.05$ was employed. It is noticeable that the propagation of the uncertainty due to the positioning angle parameter is the most relevant and the uncertainty due to the stiffness parameters at the beam-to-hub connection is not quite relevant.

The previous analysis was done for a rotating beam with a step-wise acceleration, which depending on the case could have a high oscillatory response, with high stress gradients that could eventually lead to failure. Other type of rotation rules can avoid high oscillatory response if the acceleration, velocity and position angle can vary smoothly like in the following rule:

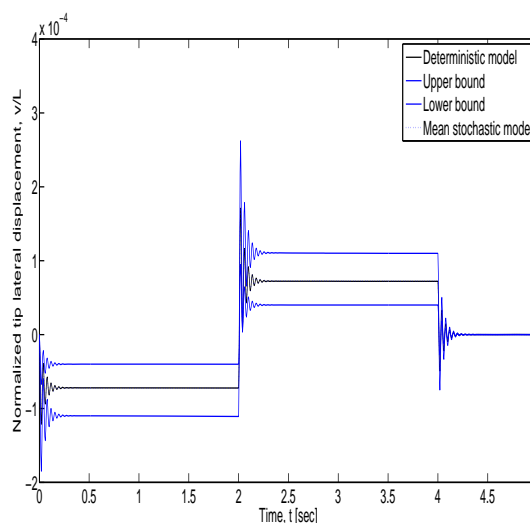


Figure 5. Tip displacement history for a composite beam that rotates according to Eq. (38), for $\delta_{V_i} = 0.1$ in all variables.

$$\dot{\psi}(t) = \frac{\psi_0 \pi}{2T_0} \left[\sin\left(\frac{\pi t}{T_0}\right) - \frac{1}{2} \sin\left(\frac{2\pi t}{T_0}\right) \right] \quad (39)$$

In Eq. (39), two possible sources of uncertainties can be taken into account. The first can be identified as the spread angle ψ_0 , and the second can be recognized as the positioning time T_0 . These sources of uncertainty are here considered with random variables V_5 and V_6 having uniform distribution. Also, random variables V_5 and V_6 are independent and not correlated. Then, the probabilistic model for this case has in common with the previous study the random variables V_1, V_2 and V_3 .

In Fig. 7 one can see the stochastic transient response of composite beam with the same features of the previous study for variation coefficient $\delta = 0.02$ in all random variables, i.e. V_1, V_2, V_3, V_5 and V_6 . The mean values of the random variables V_5 and V_6 are $\underline{V}_5 = 2.0 \text{ sec}$ and $\underline{V}_6 = 2.0 \text{ rad}$. In Fig. 8 the stochastic response for a variation coefficient $\delta = 0.05$ is shown. In both figures the upper and lower bounds of the 95% confidence interval are included.

As well as in the previous example with the step-wise acceleration rule, in the case of Eq. (39) the influence of different random variables in the propagation of the uncertain response was evaluated. Thus, in Fig. 9(a) one can see the influence of only random variable V_3 for a variation coefficient $\delta_{V_3} = 0.05$; on the other hand, in Fig. 9(b) one can see the uncertainty propagation related to random variables V_5 and V_6 , also with a variation coefficient $\delta_{V_5} = \delta_{V_6} = 0.05$. In both cases the 95% confidence interval was included. The difference between the cases are remarkable. A comparison between Fig. 9 and Fig. 8(a) implies that the uncertainty in the response can propagate more due to kinematic parameters (actually, V_5 and V_6) than due to geometric parameters (actually, V_3 or V_1 and V_2).

Conclusions

In this paper some aspects related to the uncertain dynamics of rotating composite non-linear beams have been addressed. The present study has been restricted within the context of the elastic



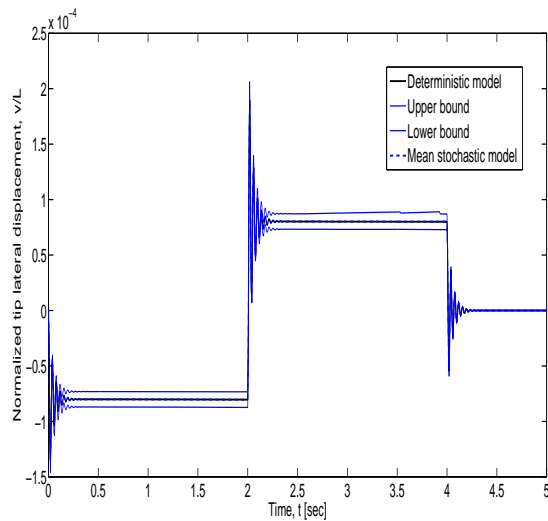


Figure 6. Tip displacement history for a composite beam that rotates following Eq. (38), for $\delta_{v_i} = 0.05$ (a) only in random variable V_3 , (b) only in random variable V_4 .

behavior of a composite structure. The effect of the uncertain parameters such as beam-to-hub connection stiffness, angle of clamping and positioning angle (speed and/or acceleration) has been studied. From the different studies carried out some points should be remarked:

- The propagation of uncertainty in the tip displacement of the transient response, due to stiffness parameters k_v and k_θ , is very small.
- The propagation of uncertainty due to the random variable associated with the angle of the beam-to-hub connection is more important than the influence of the uncertainty in the stiffness parameters.
- The propagation of uncertainties due to the random variables associated with the positioning angle (as well as angular velocity and/or acceleration) is quite remarkable.
- The propagation of uncertainty in the transient response due

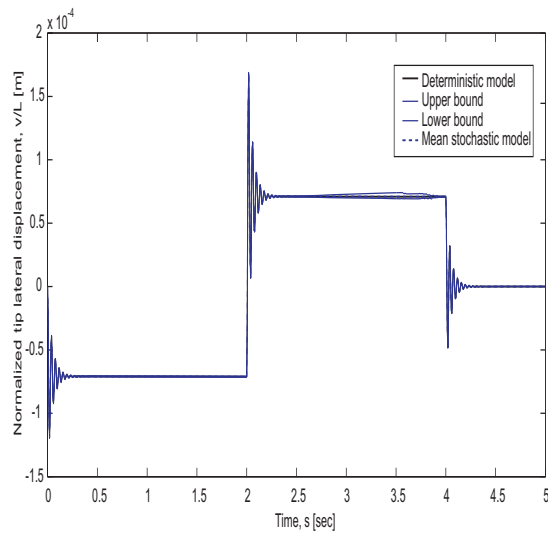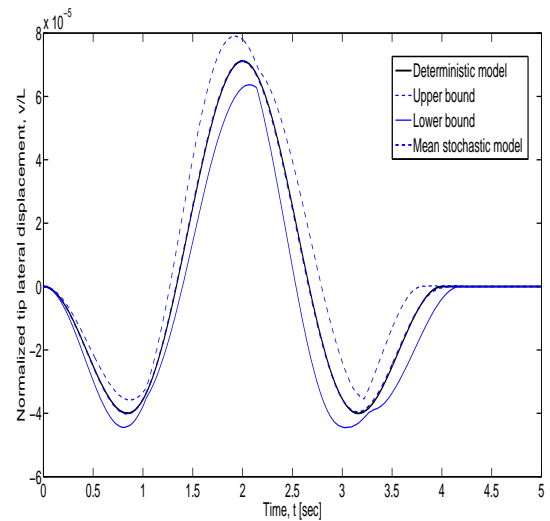

(a) Figure 7. Tip displacement history for a composite beam that rotates following Eq. (39), for $\delta_{v_i} = 0.02$ in all variables.

to the clamping parameters all together is small in comparison to the uncertainty propagation associated with the positioning angle (velocity, acceleration) parameters.


Other features of the model itself can be subjected to uncertainty, as for example the orientation of the reinforcing fibers or the uncertainty of material constituents (elasticity modulus, material density, etc.). On the one hand, many of these parameters can be treated as random variables, although there is an uncertainty related to the model and in this context a more sophisticated analysis tool should be employed, for example the non-parametric probabilistic approach. On the other hand, the material properties along the beam can vary due to uncertainties in the composite fabrics and the construction process; that leads to a stochastic field, then Markov-chain and Monte Carlo method should be taken into consideration to face at this particular problem. However, these topics are the matter of ongoing works.

Acknowledgements


The authors gratefully acknowledge the support of the following Argentinean and Brazilian institutions: *Consejo Nacional de Investigaciones Científicas y Técnicas (CONICET)*, *Secretaría de Ciencia y Tecnología*, *Universidad Tecnológica Nacional*, *Conselho Nacional de Desenvolvimento Científico e Tecnológico (CNPQ)* and *Fundação de Amparo à Pesquisa do Estado do Rio de Janeiro (FAPERJ)*.

References


Bathe, K., 1982, "Finite element procedures in engineering analysis". Prentice-Hall, Englewood Cliffs, USA.
 Chen, C., Chen, L., 2001, "Random response of a rotating composite blade with flexure-torsion coupling effect by the finite element method", *Composite Structures*, Vol. 54, pp. 407-415.
 Cheng, J., Xiao, R., 2007, "Probabilistic free vibration of beams subjected to axial loads", *Advances in Engineering Software*, Vol. 38, No. 1, pp. 31-38.
 Chung, J., Yoo, H., 2002, "Dynamic analysis of a rotating cantilever beam using the finite element method", *Journal of Sound and Vibration*, Vol. 249, No. 1, pp. 147-164.

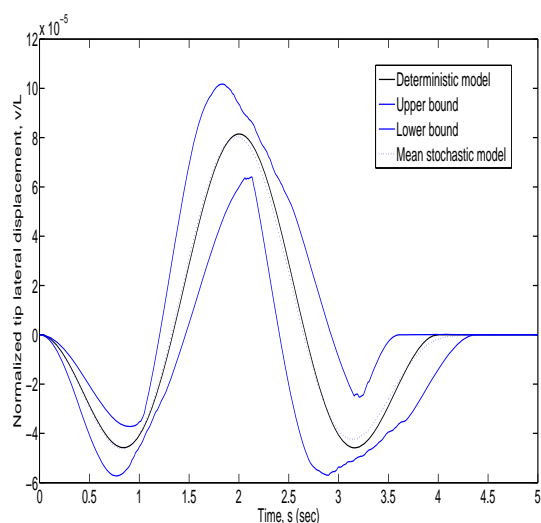


(a)

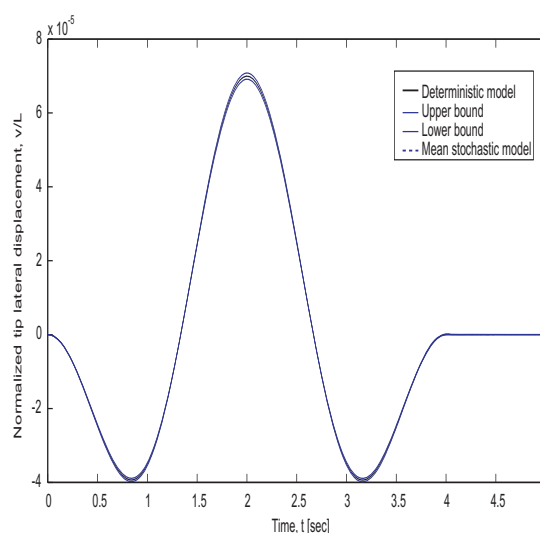

(a)

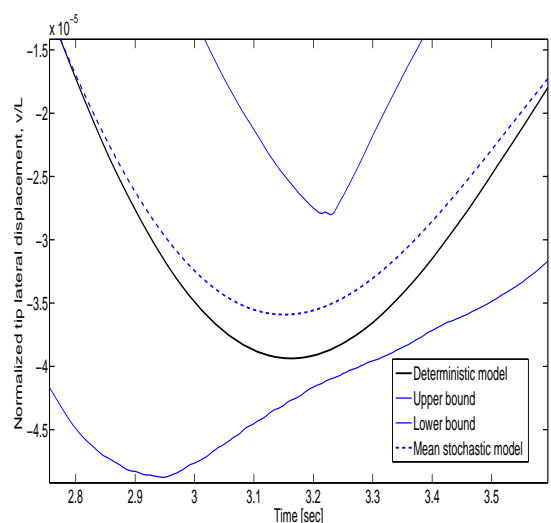

(b)

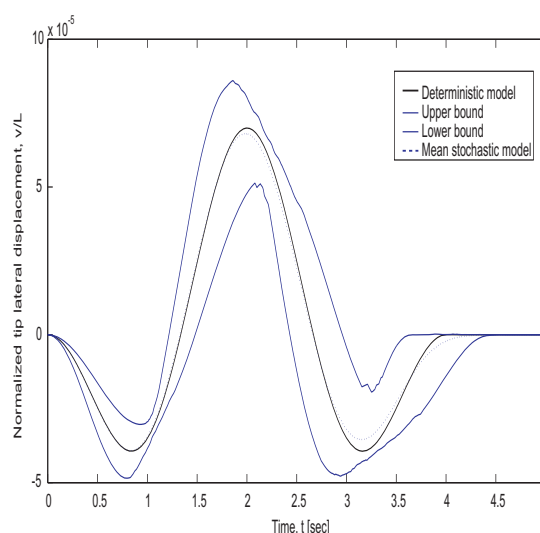

(b)

Figure 8. (a) Tip displacement history for a composite beam that rotates following Eq. (39), for $\delta_{v_i} = 0.05$ in all variables, (b) a detail.

Figure 9. Tip displacement history of a composite beam that rotates following Eq. (39) for $\delta_{v_i} = 0.05$ (a) only in random variable V_3 , (b) in random variables V_5 and V_6 .

Cortínez, V., Piovan, M., 2002, "Vibration and buckling of composite thin walled beams with shear deformability", *Journal of Sound and Vibration*, Vol. 258, No. 4, pp. 701-723.

Hosseini, S., Khadem, S., 2007, "Vibration and reliability of a rotating beam with random properties under random excitation", *International Journal of Mechanical Sciences*, Vol. 49, No. 12, pp. 1377-1388.

Li, J., Wu, G., Shen, R., Hua, H., 2005, "Stochastic bending-torsion coupled response of axially loaded slender composite-thin-walled beams with closed cross-sections", *International Journal of Mechanical Sciences*, Vol. 47, No. 1, pp. 134-155.

Lin, S., 2001, "The probabilistic approach for rotating timoshenko beams", *International Journal of Solids and Structures*, Vol. 38, No. 40-41, pp. 7197-7213.

Mayo, J., Garcia-Vallejo, D., Domínguez, J., 2004, "Study of the geometric stiffening effect: Comparison of different formulations", *Multibody System Dynamics*, Vol. 11, No. 4, pp. 321-341.

Meirovitch, L., 1997, "Principles and Techniques of Vibrations", Prentice-Hall Inc., USA.

Murugan, S., Ganguli, D., Harursampath, D., 2008, "Aeroelastic response of helicopter rotor with random material properties", *Journal of Aircraft*, Vol. 45, No. 1, pp. 306-322.

Piovan, M., 2003, "Estudio teórico y computacional sobre la mecánica de vigas curvas de materiales compuestos, con sección de paredes delgadas,

considerando efectos no convencionales", Phd. thesis, Departamento de Ingeniería Universidad Nacional del Sur, Argentina.

Piovan, M., Cortínez, V., 2005, "The transverse shear deformability in dynamics of thin walled composite beams: consistency of different approaches", *Journal of Sound and Vibration*, Vol. 285, No. 3, pp. 721-733.

Piovan, M., Cortínez, V., 2007, "Mechanics of shear deformable thin-walled beams made of composite materials", *Thin-Walled Structures*, Vol. 45, No. 1, pp. 37-72.

Przemieniecki, J., 1968, "Theory of matrix structural analysis", McGraw-Hill Company, New York, USA.

Rao, J., 1987, "Turbomachine blade vibration", *The shock and vibration digest*, Vol. 19, No. 3, pp. 3-10.

Ritto, T., Sampaio, R., Cataldo, E., 2008, "Timoshenko beam with uncertainty on the boundary conditions", *Journal of the Brazilian Society of Mechanical Sciences and Engineering*, Vol. 30, No. 4, pp. 295-303.

Saravia, C., Machado, S., Cortínez, V., 2011, "Free vibration and dynamic stability of rotating thin-walled composite beams", *European Journal of Mechanics, A/Solids*, Vol. 30, No. 3, pp. 432-441.

Simo, J., Vu-Quoc, L., 1986, "A three dimensional finite-strain rod model. part ii: computational aspects", *Computer Methods in Applied Mechanics and Engineering*, Vol. 58, No. 1, pp. 79-116.

Simo, J., Vu-Quoc, L., 1987, "The role of non-linear theories in transient

dynamic analysis of flexible structures”, *Journal of Sound and Vibration*, Vol. 119, No. 3, pp. 487-508.

Soize, C., 2001, “Maximum entropy approach for modeling random uncertainties in transient elastodynamics”, *Journal of Acoustical Society of America*, Vol. 109, No. 5, pp. 1979-1996.

Trindade, M., Sampaio, R., 2002, “Dynamics of beams undergoing large rotations accounting for arbitrary axial deformation”, *Journal of Guidance, Control and Dynamics*, Vol. 25, No. 4, pp. 634-643.

Zibdeh, H., Abu-Hilal, M., 2003, “Stochastic vibration of laminated composite coated beam traversed by random moving load”, *Engineering Structures*, Vol. 25, No. 3, pp. 397-404.